

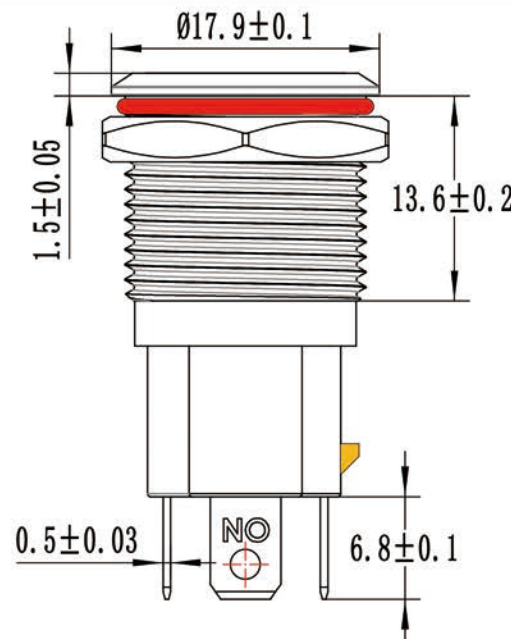
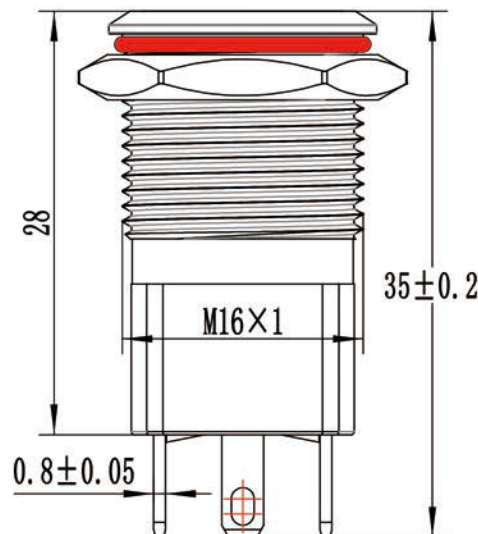





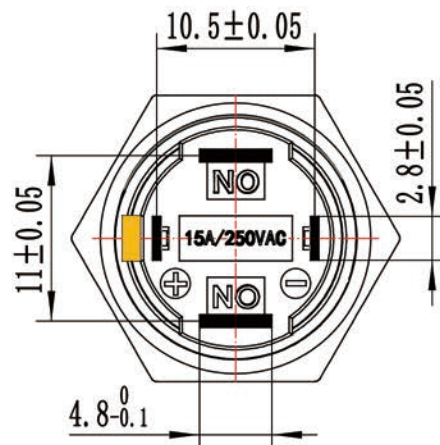


RUGSWT

未经书面允许，严禁打印和复印

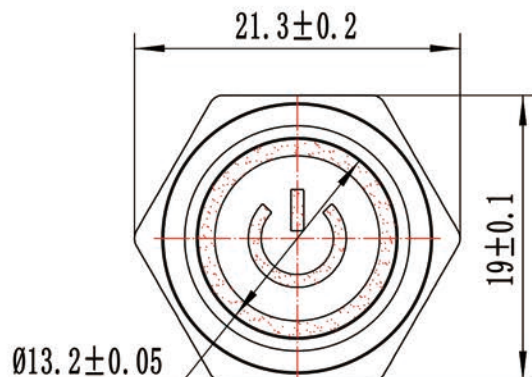

Mounting hole diameter 安装孔直径	16~16.2mm		Switch combinations 开关组合	1NO (一常开)	Housing material 外壳材质	SUS304/Brass nickel-plated/aluminum alloy anodized SUS304/黄铜镀镍/铝合金阳极氧化
Switching voltage 开关电压	1.5V~250VAC/DC		Lamp bead voltage 灯珠电压	AC/DC: 3.3V、6V、9V、12V、24V、36V、48V、110V、220V	Key Material 按键材质	PC&SUS316 聚碳&不锈钢SUS316
Current rating: 额定电流:	Resistive loads 阻性负载	DC-13:12V/24V 10A	Lamp bead current 灯珠电流	2mA~20mA	Contact material 触点材质	Silver tin oxide alloy contacts 银氧化锡合金触点
		AC-15:110V/250V 15A				
	Inductive loads 感性负载	AC-15:110V/250V 4A	PIN pin style PIN脚样式	Switch pin 4.8 x 0.8&LED pin 2.8 x 0.5 开关插针4.8×0.8&LED插针2.8×0.5	Electrical life 电气寿命	DC-13:12V/24V 10A >30,000 times AC-15:110V/250V 15A >3万次
DC-13:110V 4A						
Rated heating current 额定发热电流	ith: 15A/250VAC		Base material 基座材质	Modified nylon PA66 改性尼龙PA66	Contact resistancech 接触阻值	Contact resistancech ≤50mΩ
Waterproof rating 防水等级	IP65 at the end of the button, IP67 optional 按键端IP65&IP67		Dielectric strength 绝缘强度	≥100MΩ 500VDC /h	Press down on pressure 按键下压力	Approximately 2.5~4N 约2.5~4N
Ambient temperature 环境温度	-30℃~85℃		Compressive strength 耐压强度	Pins and housings 2500VAC 20mA/min 引脚与外壳 2500VAC 20mA/min	Button travel 按键行程	The key stroke is 3mm and the contact stroke is 1.5mm 按键行程3mm 接触行程1.5mm
Form of work 工作形式	Self-locking/self-resetting (optional) 自锁式/自复式(可选)		Glowing color 发光颜色	Red, green, yellow, blue, white 红、绿、黄、蓝、白		

单色发光
One colorExplanation of switch working status
开关工作状态说明Button - Press down
按键-按下Button - Eject
按键-弹出POWER ON
接通Power OFF
断开平头按键-代号: P
Flat head button - Code: P高头按键-代号: G
High-head button - Code: G球头按键-代号: Q
Ball button - Code: Q蘑菇头按键-代号: M
Mushroom head button - code: M环环&电源标-代号: EC
Ring & Power Label - Codename: EC环环-代号: E
Ring - Codename: E电源标-代号: C
Power Label - Codename: C定制字符-代号: T
Custom character - Codename: T圆点发光-代号-D
Dots glow - codename - D整圆发光-代号-O
Overall luminescence: O3D View:
三维视图:Schematic Diagram:
电气原理:Cut-out size:
开孔尺寸:PART NAME: SCJ16D Series Pushbutton Switches Datasheet
零件名称: SCJ16D系列按钮开关规格书PART No.: SCJ16D-P1-EC-GGS01
零件编号:武汉速科捷智能科技有限公司
WUHAN SUKEJIE INTELLIGENT TECHNOLOGY CO.,LTDMATERIAL: /
材料: /SCALE: 2:1
比例:SHEET: 3 / 1
页数: 第 1 页 共 3 页PART No.: /
料号: /DRAWN: 2024.03.13
绘图:CHECK: 2024.03.13
审核:APPROVAL: 2024.03.13
批准:VERISON: V0.0
版本:WEIGHT(g): 10
重量:UNIT: mm
单位:SIZE: A4
图幅:

PROJECTION: 投影: