


Mounting hole diameter 安装孔直径	19~19.2mm	Switch combinations 开关组合	1NO (一常开)	Housing material 外壳材质	SUS304/Brass nickel-plated/aluminum alloy anodized SUS304/黄铜镀镍/铝合金阳极氧化
Switching voltage 开关电压	1.5V~250VAC/DC	Contact material 触点材质	Silver tin oxide alloy contacts 银氧化锡合金触点	Key Material 按键材质	PC&SUS316 聚碳&不锈钢SUS316
Current rating: 额定电流:	Resistive loads 阻性负载	DC-13:12V/24V 10A AC-15:110V/250V 15A	PIN pin style PIN脚样式	Electrical life 电气寿命	DC-13:12V/24V 10A >30,000 times AC-15:110V/250V 15A >3万次
	Inductive loads 感性负载	AC-15:110V/250V 4A DC-13:110V 4A		Contact resistance 接触阻值	Contact resistance ≤50mΩ
Rated heating current 额定发热电流	ith: 15A/250VAC	Base material 基座材质	Modified nylon PA66 改性尼龙PA66	Press down on pressure 按键下压力	Approximately 2.5~4N 约2.5~4N
Waterproof rating 防水等级	IP67 at the end of the button 按键端IP67	Dielectric strength 绝缘强度	≥100MΩ 500VDC /h	Button travel 按键行程	The key stroke is 3mm and the contact stroke is 1.5mm 按键行程3mm 接触行程1.5mm
Ambient temperature 环境温度	-30℃~85℃	Compressive strength 耐压强度	Pins and housings 2500VAC 20mA/min 引脚与外壳 2500VAC 20mA/min		
Form of work 工作形式	Self-locking/self-resetting (optional) 自锁式/自复式(可选)				

Explanation of switch working status 开关工作状态说明	
Initial state 初始状态	Button - Press down 按键-按下
Button - Eject 按键-弹出	Power ON 接通
Power OFF 断开	

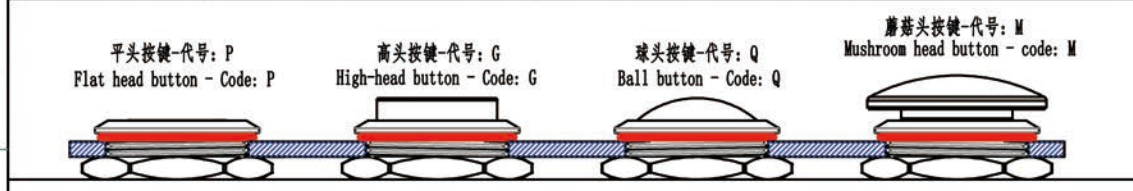

定制字符-代号: T
Custom character - Codename: T

This model switch can be customized with any character, but it does not have the character light function!
本型号开关可定制任意字符,但不带字符发光功能!

3D View: 三维视图:	Schematic Diagram: 电气原理:	Cut-out size: 开孔尺寸:	PART NAME: 零件名称:	MATERIAL: 材料:	DRAWN: 绘图:	WEIGHT (g): 重量:
			SCJ19D1 Series Pushbutton Switches Datasheet SCJ19D1系列按钮开关规格书	/	日期 2024.03.13	10
			PART No.: 零件编号:	SCALE: 比例:	CHECK: 审核:	UNIT: 单位:
			SCJ19D1-P0-GGS01	2:1	日期 2024.03.13	mm
				SHEET: 页数:	APPROVAL: 批准:	SIZE: 图幅:
			武汉速科捷智能科技有限公司 WUHAN SUKEJIE INTELLIGENT TECHNOLOGY CO.,LTD	2 / 1 第 1 页 共 2 页	日期 2024.03.13	A4
				PART No.: 料号:	VERISON: 版本:	PROJECTION: 投影:
				/	VO.0	